

# Intense Crushing 25 - 60 HP

## Swing Flail Mower RBRM 115/130/155DG30

### Hydraulic Offset Kit DGH30 optional

Microtractor 20 - 45 HP with power grip 540 tr/min equipped with 1 double acting control valve for hydraulic kit

Working width 115, 130 and 155 cm

3 point linkage cat.1

Delivered with cardan shaft

Adjustable offset 30 cm by mechanical indexing

Y - knives width 40 mm thickness 5 mm

Cutting height adjustable from -1.5 to 11cm depending on knife type (Y, hammer, paddles or scarificator)



### The advantages :

**Helical steel gearbox with free wheel:** *Transmission of efforts without noise or vibration*

**Substantial fuel savings due to the rotor design**

**Rotor with helical position:** *even drive without effort for optimal crush. Big rotor tube : cutting rigidity and inertia, electronic balancing after assembly of knives. Reduced energy consumption and CO2-emission*

**High rotation speed:** *rotation 2500 tr/min, cutting speed of 42m/s for a perfect cut and crush*

**System to avoid grass jam:** *no risk of grass winding around the roll*

**Curved chassis:** *the chassis form and the particular disposition of the back roll optimize the ventilation, ejection and self-cleaning of the roll* **Armoured sheet thickness 3 mm on model 155**

**Large opening:** *allows to swallow the vegetation without flatten*

**Haute ouverture à l'entrée :** *permet d'avaler la végétation haute sans la coucher.*

**Drive:** 3 trapezoidal belts, adjustable tension can be controlled easily

**Security, ergonomic:** lateral deflectors adjustable, front flaps anti-projection, lubrication accessible without disassembly

**Option hydraulique :** Cylinder hoses with coupling 1/2" and valves for speed setting. Cylinder stroke 30 cm. A tractor with 2 double acting control valves is necessary

	(CV)	Number of tools			Overall dimensions	Weight (kg)
		"Y"	Paddles hammers	scarificators	L x l x h (cm)	
RBRM115DG30	25/50	40	20	60	75 x 132 x 90	190
RBRM130DG30	25/60	44	22	66	75 x 147 x 90	200
RBRM155DG30	30/60	52	26	78	75 x 172 x 90	220



Serial Assembly with Y-knives

Optional assembly :

Paddles

hammers

scarificators

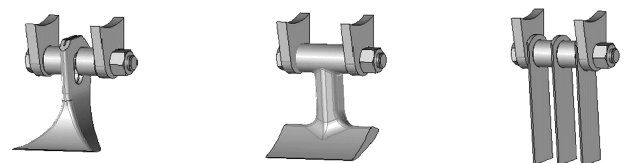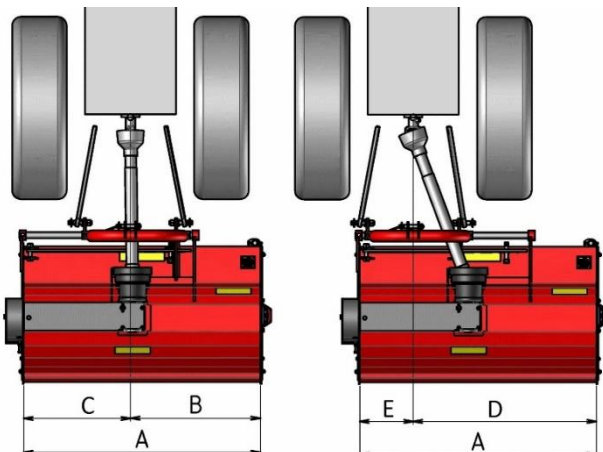

	A	B	C	D	E
RBRM115DG30	115	55	60	85	30
RBRM130DG30	130	70	60	100	30
RBRM155DG30	155	77	78	107	48

