

PROFESSIONAL Rotary trimmer

RTPM 125 - 150 - 175

Tractor 40 - 90 HP with power grip 540 tr/min



Working width 125, 150 or 175 cm

Rotor Ø 505 mm with 6 helical blades per flansh

Chain transmission

Reinforced 3 point linkage cat.1 or 2, adjustable and offset

Delivered with transmission with friction clutch

REF.	(HP)	Working width (cm)	Offset (cm)	Number of knives	Rotor speed (tr/min)	Overall dimensions L x l x h (cm)	Weight (kg)
RTPM 125	40-80	125	15	30	210	142 x 99 x 104	390
RTPM 150	45-85	150	15	36	210	167 x 99 x 104	420
RTPM 175	55-90	175	15	42	210	192 x 99 x 104	450

The advantages:

Rotor with helical position: even drive without effort for optimal crush and hitchless, the blade holder are unalterable

Chassis reinforced with 2 renforcé par 2 armour steel sheets: avoids deformation by stone projections

Transmission: reinforced high resistance chains, toothing pinons wear-proof and friction clutch to protect the rotor form impacts



Oversized rotor bearing with optimal sealing: ball bearing Ø50 heavy series and mechanical face seal type for protection

Lateral deflectors anti-spitting to avoid windrows


Rear hood thick-walled shock-resistant, for better land leveling

Option :

REF.		Weight (kg)		
Working Width		125 cm	150 cm	175 cm
1	Trailing board spring - PCAPRTPM	3	3	3
2	Pair of conveying discs – DLRTPM	40	40	40
3	Cage roller – RCRTPM	84	90	101
4	Packer roller – RPKRTPM	159	174	195

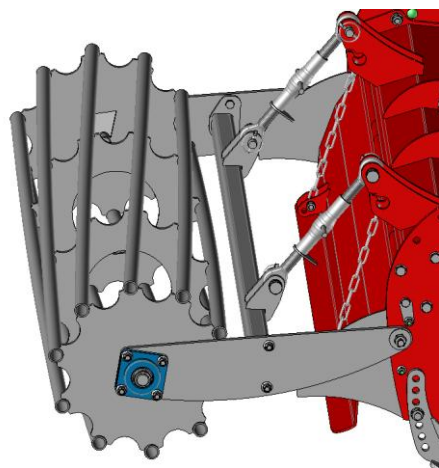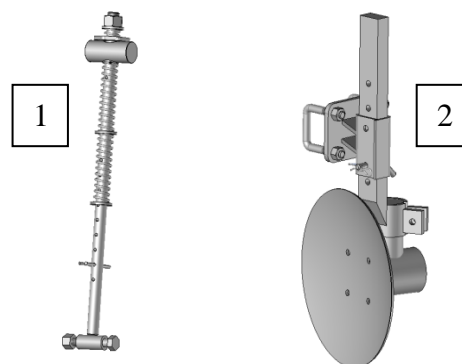

3

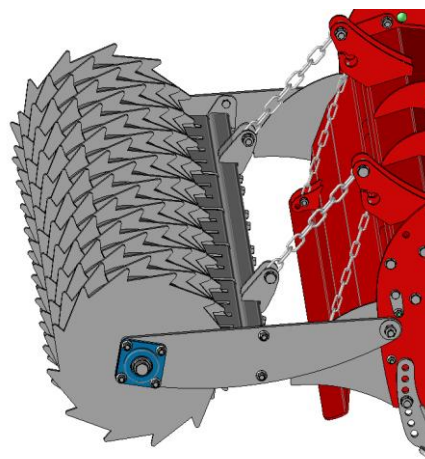


4

Reinforced transmission high resistance


Automatic chain tension

Lateral protection

Reinforced armour steel bases adjustable in 7 positions

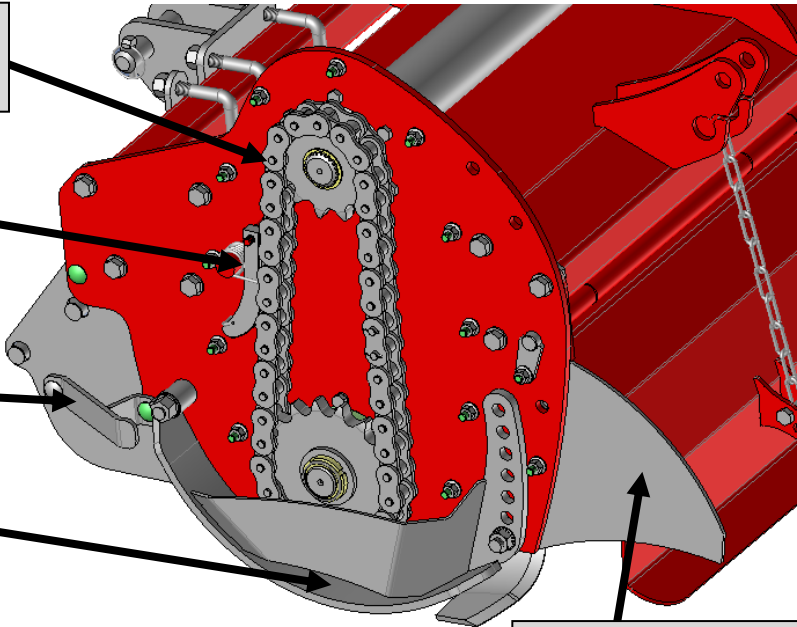

Lateral deflector anti widow

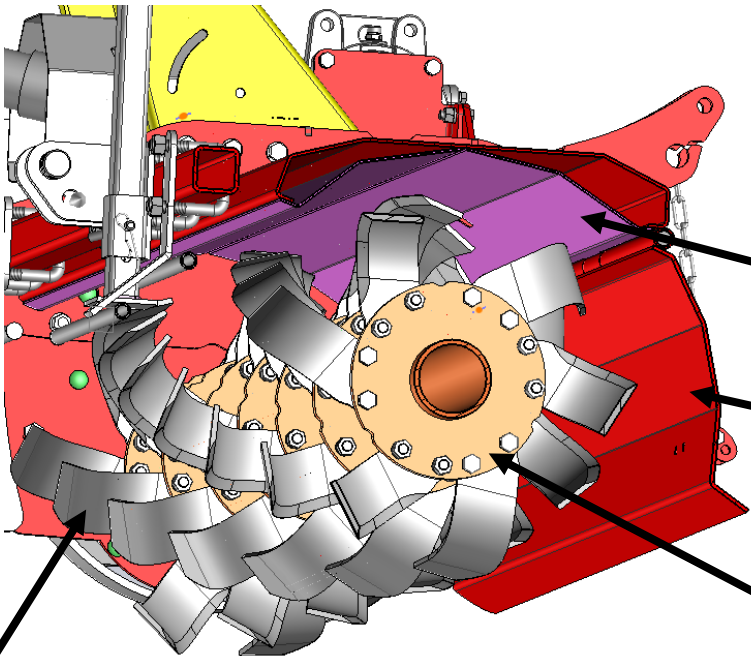

Reinforced chassis with 2 interior armour steel sheet

Thick-walled choc resistant rear hood

Armour steel flashes

Blades in helical position

Sealing joint

anti-intrusion system

